

PETROLEUM TECHNOLOGY COMPANY

The Artificial Lift Company

SAFELIFT™

www.ptc.as

1.0" - Orifice gas lift valve



SAFELIFT™

The PTC SafeLift™ is a spring activated IPO/Orifice gas lift valve with a true metal-to-metal seal which is qualified as a well barrier.

Built on a combination of streamlined design, few moving parts and an optimized material composition – the SafeLift™ is a very robust valve ideal for long life service also in harsh environments (H₂S, CO₂).

Advanced flow simulations and special chemical coating processes have been applied to create a valve optimised to withstand erosion and to retain operational integrity for the lifetime of your well.

The PTC Safelift™ has documented performance in harsh conditions and has passed extensive erosion tests, including high volume, high rate unloading with erosive, particle contaminated fluids.

The SafeLift™ valve is designed to be retrofit to all side-pocket mandrels in the market according to ISO 17078-1. It is designed, built and tested in accordance to ISO 17078 part 1 & 2 (E4, Q1, V1, F1) and ISO 14310-V1/V0.

DESIGN SPECIFICATIONS	
Description	SafeLift™ 1.0"
Service	CO ₂ , H ₂ S Unique Service (pp H ₂ S ₀ = 20 bar)
Valve Body Material	Inconel 718 OTHER MATERIAL AVAILABLE ON REQUEST
Extension Material	17-4 PH
Spring Material	MP35N
Elastomer Material	ENDURA/REINFORCED PTFE
Seat Protection	TFF HARD SURFACE COATING
Maximum OD	1.01"
Length	12.3"
Orifice Size	1/8" to 5/16"
Stealth Orifice Available (venturi type)	Yes
Pressure Rating	5 000 PSI (Standard) 7 500 PSI (P1)
Temperature Rating	55 °C to 121 °C (Standard) 4 °C to 121 °C (T0) 55 °C to 149 °C (T1) 55 °C to 185 °C (T2) 55 °C to 200 °C (T3)
Leak Criteria for FAT Test	V1 (V0 available upon request)
Thread Connectin	11/16" - 16 UNS - 2
Certification/Qualification	ISO 17078-1 & 2 ISO 14310-V1/V0 ISO 15156

PTC

www.ptc.as

For further information contact PTC at: post@ptc.as
+47 51 95 08 00 or +1 281 378 4776 or +44 (0)1224 57 93 50


PETROLEUM TECHNOLOGY COMPANY

The Artificial Lift Company

SAFELIFT™

www.ptc.as

1.5" - Orifice gas lift valve

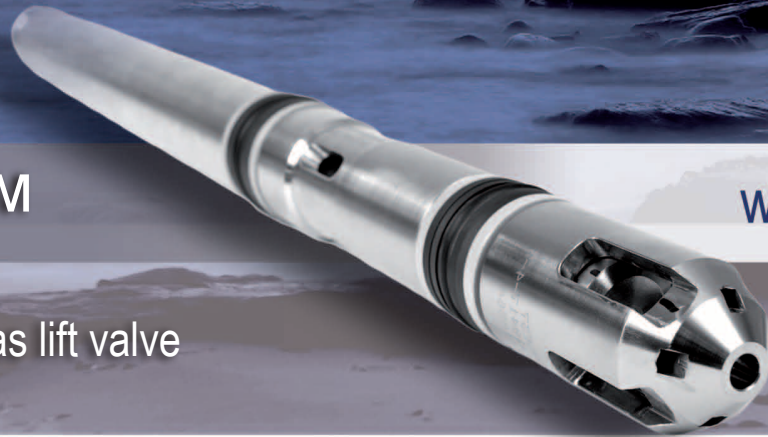

SAFELIFT™

The PTC SafeLift™ is a spring activated orifice gas lift valve with a true metal-to-metal seal which is qualified as a well barrier.

Built on a combination of streamlined design, few moving parts and an optimized material composition – the SafeLift™ is a very robust valve ideal for long life service also in harsh environments (H₂S, CO₂).

Advanced flow simulations and special chemical coating processes have been applied to create a valve optimised to withstand erosion and to retain operational integrity for the lifetime of your well.

The PTC SafeLift™ has documented performance in harsh conditions and has passed extensive erosion tests, including high volume, high rate unloading with erosive, particle contaminated fluids.

The SafeLift™ valve is designed to be retrofit to all side-pocket mandrels in the market according to ISO 17078-1. It is designed, built and tested in accordance to ISO 17078 part 1 & 2 (E4, Q1, V1, F1) and ISO 14310-V1/V0.

DESIGN SPECIFICATIONS	
Description	SafeLift™ 1.5"
Service	CO ₂ , H ₂ S Unique Service (pp H ₂ S ₀ = 20 bar)
Valve Body Material	Inconel 718 OTHER MATERIAL AVAILABLE ON REQUEST
Extension Material	17-4 PH
Spring Material	MP35N
Elastomer Material	ENDURA/REINFORCED PTFE
Seat Protection	TFF HARD SURFACE COATING
Maximum OD	1.5"
Length	21.65"
Orifice Size	1/8" to 1/2"
Stealth Orifice Available (venturi type)	Yes
Pressure Rating	5 000 PSI (Standard) 7 500 PSI (P1) 10 000 PSI (P1)
Temperature Rating	55 °C to 121 °C (Standard) 4 °C to 121 °C (T0) 55 °C to 149 °C (T1) 55 °C to 185 °C (T2) 55 °C to 200 °C (T3)
Leak Criteria for FAT Test	V1 (V0 available upon request)
Thread Connectin	1-1/16" - 18 UNEF - 2
Certification/Qualification	ISO 17078-1 & 2 ISO 14310-V1/V0 ISO 15156

PTC

www.ptc.as

For further information contact PTC at: post@ptc.as
+47 51 95 08 00 or +1 281 378 4776 or +44 (0)1224 57 93 50

PETROLEUM TECHNOLOGY COMPANY

The Artificial Lift Company

SAFELIFT™

1.75" - orifice gas lift valve

www.ptc.as



SAFELIFT™

The PTC SafeLift™ is a spring activated orifice gas lift valve with a true metal-to-metal seal which is qualified as a well barrier.

Built on a combination of streamlined design, few moving parts and an optimized material composition – the SafeLift™ is a very robust valve ideal for long life service also in harsh environments (H₂S, CO₂).

Advanced flow simulations and special chemical coating processes have been applied to create a valve optimised to withstand erosion and to retain operational integrity for the lifetime of your well.

The PTC Safelift™ has documented performance in harsh conditions and has passed extensive erosion tests, including high volume, high rate unloading with erosive, particle contaminated fluids.

The SafeLift™ valve is designed to be retrofit to all side-pocket mandrels in the market according to ISO 17078-1. It is designed, built and tested in accordance to ISO 17078 part 1 & 2 (E4, Q1, V1, F1) and ISO 14310-V1/V0.

DESIGN SPECIFICATIONS

Description	SafeLift™ 1.75"
Service	CO ₂ , H ₂ S Unique Service (pp H ₂ S ₀ = 20 bar)
Valve Body Material	Inconel 718 OTHER MATERIAL AVAILABLE ON REQUEST
Extension Material	17-4 PH
Spring Material	MP35N
Elastomer Material	ENDURA/REINFORCED PTFE
Seat Protection	TFF HARD SURFACE COATING
Maximum OD	1.7"
Length	25.6"
Orifice Size	1/8" to 0.7"
Stealth Orifice Available (venturi type)	Yes
Pressure Rating	5 000 PSI (Standard) 7 500 PSI (P1) 10 000 PSI (P2)
Temperature Rating	55 °C to 121 °C (Standard) 4 °C to 121 °C (T0) 55 °C to 149 °C (T1) 55 °C to 185 °C (T2) 55 °C to 200 °C (T3)
Leak Criteria for FAT Test	V1 (V0 available upon request)
Thread Connectin	1-1/16" - 18 UNEF - 2
Certification/Qualification	ISO 17078-1 & 2 ISO 14310-V1/V0 ISO 15156

PTC

www.ptc.as

For further information contact PTC at: post@ptc.as
+47 51 95 08 00 or +1 281 378 4776 or +44 (0)1224 57 93 50